Intellian i9W

World's First & Only Global Satellite TV Service Reception 85cm Ku-band Marine Satellite Antenna







I Global satellite services compatibility

Intellian i9W provides the ultimate convenience to connect you up to thousands of Free TV, Pay TV, Standard Definition, and High Definition programming all over the world with one LNB module which incorporates multi (8) LO frequencies.

Hands-free WorldView™ LNB module

The 2nd generation, patent-pending WorldView LNB module is the latest innovation from Intellian. Unlike other TVRO system LNB's with $\pm 1,000$ kHz stability, the Intellian WorldView LNB module is built on the highest stability of ± 10 kHz which has 100 times more accuracy and greater signal sensitivity.

In addition, this LNB module receives multi-band and multi-polarization satellite TV services around the globe. Therefore, boaters don't need to manually change the LNB inside the antenna dome each time the vessel crosses into a different satellite service region.

DVB-S2 digital TV reception

Some of the HD TV services have moved onto DVB-S2 and will be more in the future. Thanks to Intellian's groundbreaking DVB-S2 digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

I Global satellite library

The i9W includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Once the satellite is selected the WorldView LNB module will automatically switch to the corresponding local frequency to receive the signal.

| Wireless connectivity & Aptus mobile

The built-in Wi-Fi enables the ACU to be wirelessly connected. PCs, laptops and smartphones can be used to connect to the ACU and monitor, control and change the settings of the system wirelessly. Intellian Aptus mobile is available for download to access to the ACU via Wi-Fi and operate the antenna from their iPhone, iPad or other network devices. iPhone and iPad are registered trademarks of Apple Inc.



Intellian i9W

85cm Ku-band 2-axis

Marine Satellite Antenna Systems

I Technical Specifications


Physical		
Radome Height	121cm / 47.5"	
Radome Diameter	113cm / 44.5"	
Reflector Diameter	85cm / 33.5"	
Weight	56.2kg / 124lbs	
Environmental		
Operating Temp. Range	-25°C to +55°C / -13°F to +131°F	
Storage Temp. Range	-40°C to +80°C / -40°F to +176°F	
Water Ingress	IPX6	
Approvals	CE / FCC	
Warranty	3 years parts and 1 year labor	
Performance		
Reception Frequency	Ku-band (10.7~12.75GHz)	
Polarization	Circular and Linear	
Minimum EIRP	44dBW	
Azimuth Range	680°	
Elevation Range	-15° to +90°	
Ship's Motion	Roll ±25°, Pitch ±15°	
Roll & Pitch Response Rate	30° / sec	
Turning Rate	30°/sec	
RF Output	Dual / Quad Output	

Antenna Control Unit			
Dimensions (WxDxH)	17.8cm x 21.7cm x 5.4cm / 7" x 8.5" x 2.1"		
Weight	1.2kg / 2.6lbs		
Display	2 line 20 Character VFD module		
GPS Interface	Built-in (NMEA 0183 GPS)		
Power Requirement	9.0~30.0V DC		
Power Consumption	Typ. 30W, Max. 50W		
LNB LO Frequencies			
Local Oscillator Frequency	Polarization	Area	
11.250 GHz	Dual Circular	North America, Russia	
10.500 GHz	Dual Circular	Latin America	
10.750 GHz	Single Circular	Korea	
10.750 GHz	Dual Circular	China	
10.678 GHz	Single Circular	Japan	
11.300 GHz	Dual Linear	South East Asia	
10.700 GHz	Dual Linear	Australia	
Universal Low: 9.75 GHz High: 10.6 GHz	Quad Linear	Europe, Middle East, Africa, some Asia countries	

Note

- LNB stability: ±25 kHz (Except at Universal 9.75 GHz)
- LNB LO frequencies can be extended
- LNB LO frequencies are automatically changed according to target satellites
- Polarization can be switched between circular and linear

I System Diagram

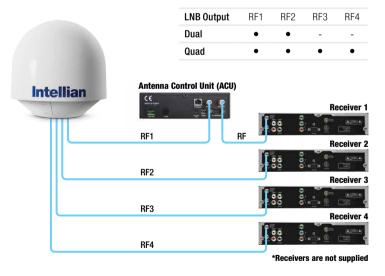

Key Features

- Global Satellite TV Services Compatibility
- Built-in WorldView LNB Module
- DVB-S2 Signal Identification
- . Built-in GPS and auto LNB pol control system
- Built-in pre-programmed global satellite library

Coverage Map

